

NASH SH75 液环真空泵 / 压缩机

NASH SH75 Liquid Ring Vacuum & Compressor




SH75液环真空泵/压缩机可在多年无需特殊养护的条件下工作。其独特的结构设计不仅满足了处理吸气介质中含有大量水蒸气的工艺要求，而且减少了部件数量和空间尺寸，具有结构简单、运行稳定、性能优越、效率高、占地面积小，维护量小的特点。

Nash's SH75 liquid ring vacuum pump and compressor provides stable and reliable operation in demanding conditions. The unique design is capable of meeting process requirements in applications where large amounts of water vapor are present in the suction medium, all in a compact, space saving package. Minimal moving parts reduce maintenance requirements, while the simple design provides stable, high-efficiency operation, and superior performance and reliability.

在无菌纸盒灌装机的配套应用中，含有双氧水的空气经液环压缩机压缩后，进入加热器加热到高温，形成无菌空气，以保证纸盒在灌装前是完全洁净的。全不锈钢材质设计满足了工艺对洁净度和耐腐蚀性能的要求。

Featuring a stainless steel construction for maximum cleanliness and corrosion resistance, the SH75 is ideal for applications such as aseptic carton filling; allowing the system to compress air containing hydrogen peroxide, and heating it to a high temperature to create aseptic air that ensures that cartons are completely sterile and free of contaminants prior to filling. All stainless steel material design to meet the process of cleanliness and corrosion resistance requirements

性能曲线 Performance Curve

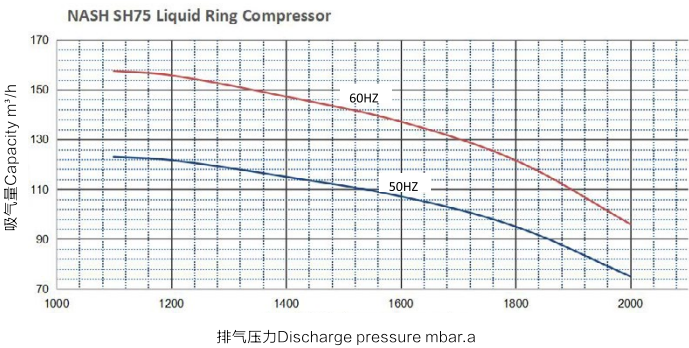

性能曲线是基于20℃ (68° F) 的饱和气和15℃ (60° F) 工作液温度，在大气压为1013mbar.a (29.92in.HgA)时的吸气能力。
性能曲线允差符合HEI和Pneurop标准。
Performance curves are based on operating conditions with saturated air at a temperature of 68° F (20° C),operating water at a temperature of 60° F (15° C) and a discharge pressure of 29.92 in. HgA (1013 mbar).
Tolerance to HEI / Pneurop standards.



主要应用 Main Applications


- | | | |
|--------------------------|--|------------------------------------|
| ● 食品工业
Food industry | ● 包装
Packaging | ● 陶瓷门锁
Ceramic latch |
| ● 实验室
Laboratory | ● 医院和检验室
Hospitals and inspection rooms | ● 气力运输
Pneumatic transportation |
| ● 化学品
Chemicals | ● 塑料挤出
Plastic extrusion | ● 挤奶机器
Milking Machine |
| ● 真空成形
Vacuum Forming | ● 过滤
Filtration | ● 印刷行业
Printing Industry |

技术参数 Basic Specification

最大吸气能力 Max.Suction Capacity	155 m³/h 91 CFM
极限真空 Vacuum Range	-931 mbar.G 27.5" Hg.V
最大排气压力 Max Discharge Pressure	2.0 bar.a 30 psi.a
轴封 Shaft Sealing	单端面机械密封 Single mechanical seal
电机功率 Motor Power	标配 4KW(50HZ) 6.3KW(60HZ)
材质 Material	全不锈钢 SS304(CF8) 或根据客 户需求。Stainless steel SS304 (CF8) or as request.
转速 rpm(50/60HZ)	1450rpm/1750rpm



外形尺寸 Dimensions

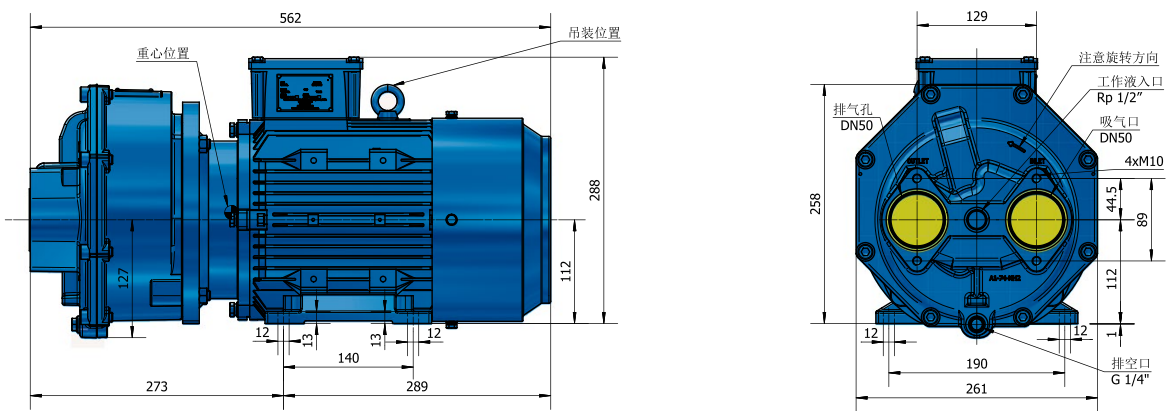

产品特性 / Features	客户收益 / Benefits
锥形叶轮设计 Conical impeller	提高了设备的效率和稳定性 Improved efficiency and reliability
更少的部件：集成的泵盖设计 Less parts: Integrated design of pump head	结构简单，降低了维护量 Simple design streamlines maintenance
机泵同轴紧凑型设计 Compact design of one shaft design	优化空间布局 Optimize spatial layout
更大的真空和压力范围 External vacuum and pressure ratings	满足更多的工况需求 Satisfy a wide range of working conditions
多种不锈钢材质可选 Available in all kinds of Stainless steel	满足不同材质需求 Material flexibility
基于全球化的产品设计 Global product design	宽广的转速范围可满足 50HZ 和 60HZ 电源直连驱动的要求 Wide speed range meets the requirements for both of 50Hz and 60Hz direct drive power
100% 性能测试 100% performance tested	可保障无故障启动和运行 Ensures trouble-free start-up and operation



NASH 产品和系统



NASH™ 液环真空泵 & 系统

可以为所有苛刻应用提供可靠和持久的解决方案。通过持续的承诺和创新，NASH 液环真空泵，满足最严格的应用要求，提高效率 and 降低使用成本。



NASH™ 和 GARO™ 液环压缩机

可以为所有苛刻应用提供坚固和可靠的解决方案。在最苛刻的条件下的应用经验证明，其设计适用于处理有毒、易爆和有腐蚀性气体。



NASH™ 罗茨增压泵复合系统

NASH 的罗茨技术是一项十分成熟的技术，可应用于多种真空场景。与其他前级泵搭成真空机组，不仅会提升极限真空，加大抽速，同时也会减少能耗，达到更理想的使用体验。



NASH™ 蒸汽喷射器和系统

无论是单独使用，还是作为 NASH Ener-Jet™ 复合真空系统的一部分，NASH 蒸汽喷射器按最佳效率设计，减少了蒸汽消耗，同时具有大处理量，保持高真空的水平。



NASH™ 干式螺杆真空泵

专为苛刻的化工工艺而设计，坚固耐用，性能优异，为客户提供洁净、高效、可靠的真空环境。



倍缔纳士官方微信服务号

订阅号：NASH SH75_202505
©2025 All Rights Reserved
(如有更改恕不通知)



倍缔纳士机械有限公司

原：纳西姆工业(中国)有限公司

山东省博山经济开发区纬五路18号

邮编：255213

电话：400 900 1066

网址：www.gdnash.cn

mk.gdnc@irco.com